

Serial connector types in practice

This document present following types of connectors (standards):

- DB-25 (EIA/TIA-232),
- DB-37 (EIA/TIA-449),
- DB-25 (EIA/TIA-530),
- 34-pin Winchester-type (V.35),
- DB-15 (X.21).

Additionally there is a HD-60 type which is serial interface type widely used in Cisco routers.

More information referring to “Cable Specifications and Information” can be found here.

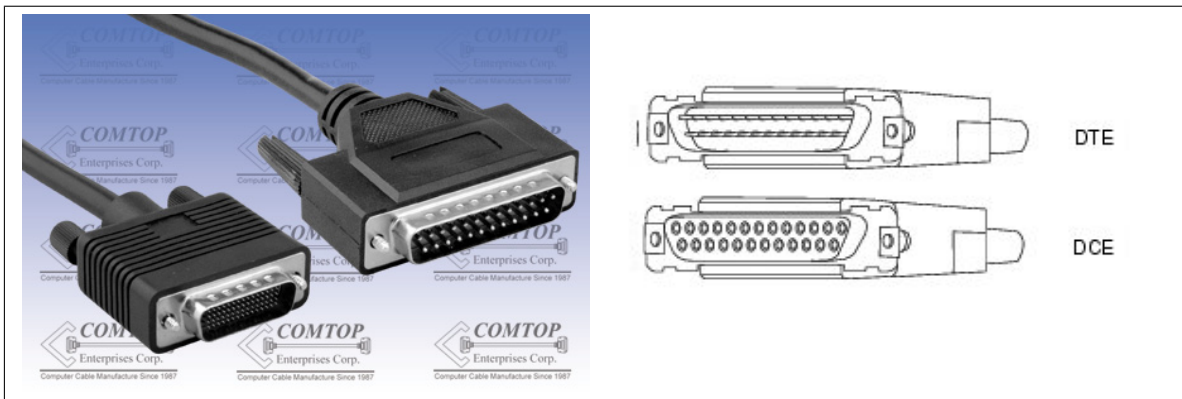


Figure 1: Connector type (standard): HD-60 (m) to DB-25 (EIA/TIA-232)

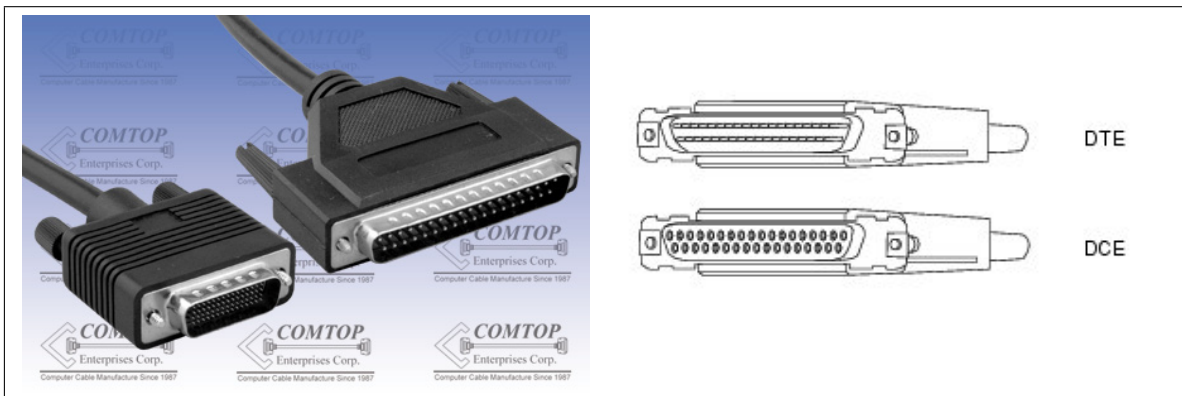


Figure 2: Connector type (standard): HD-60 (m) to DB-37 (EIA/TIA-449)

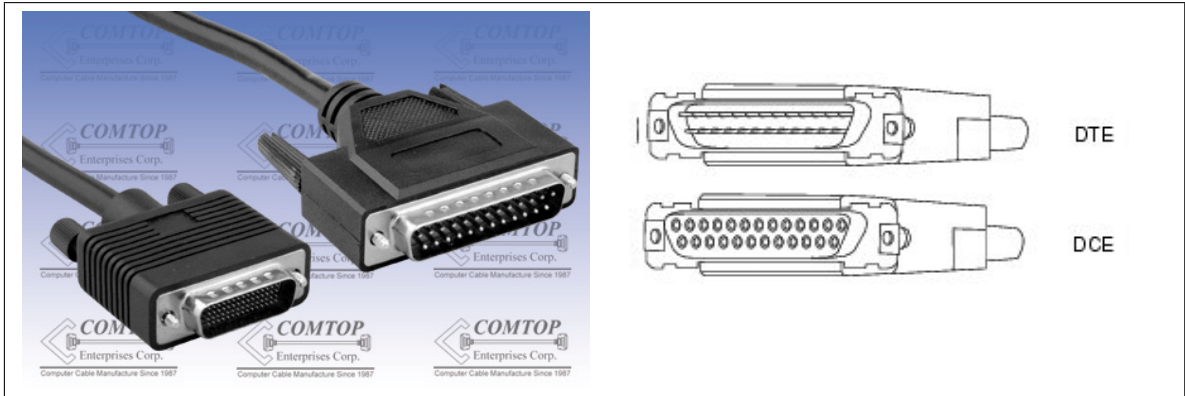


Figure 3: Connector type (standard): HD-60 (m) to DB-25 (EIA/TIA-530)

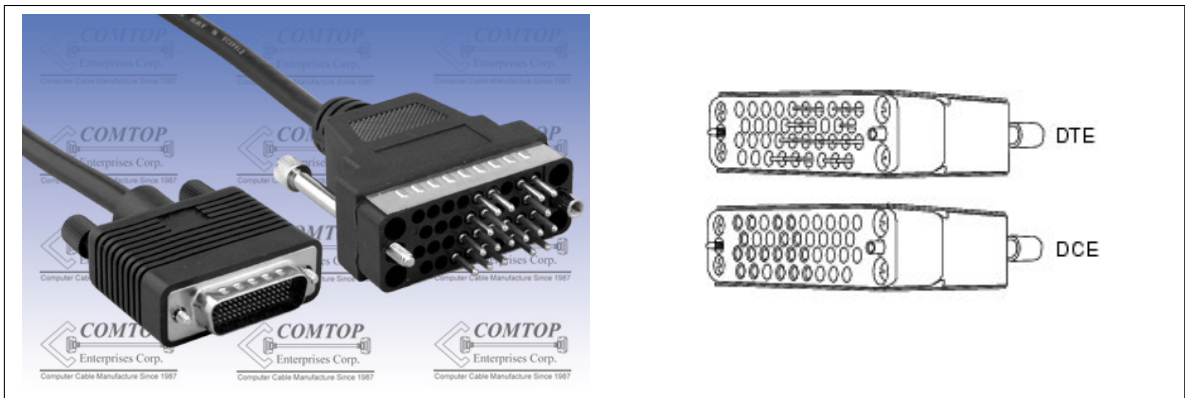


Figure 4: Connector type (standard): HD-60 (m) to 34-pin Winchester-type (V.35)

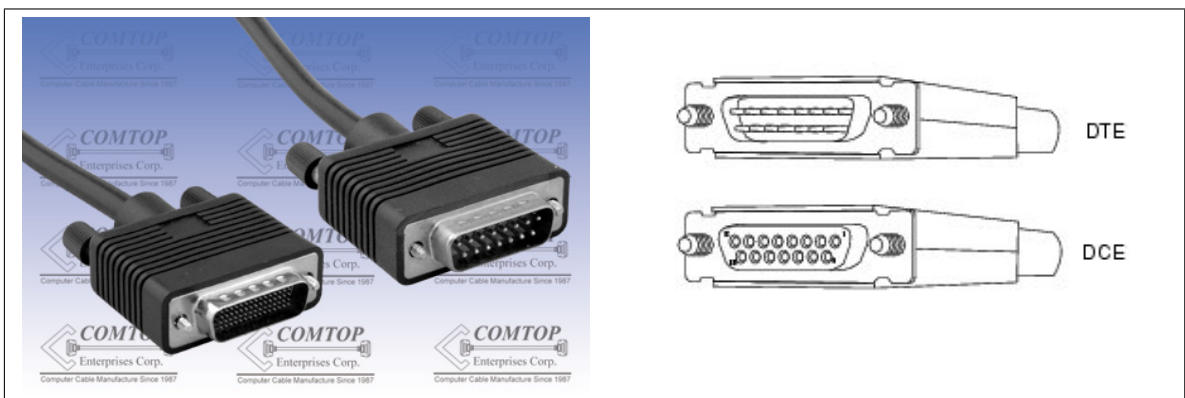


Figure 5: Connector type (standard): HD-60 (m) to DB-15 (X.21)